


## STスパイラルタップ

ST Spiral Tap

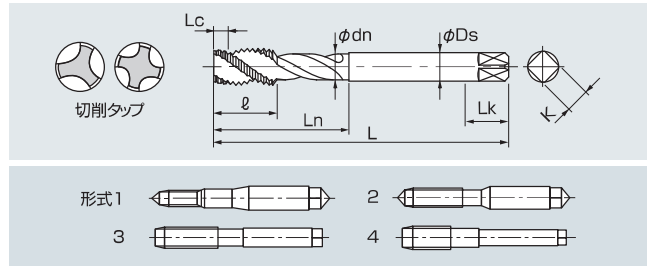

LIST 6866 オーダ方法 [Order](#) STSP 記号 Code No.

単位 (Unit):mm

記号 Code No.	呼び Thread Size	等級 TAP Limit	食付(P) Lc (P)	全長 L	ねじ長 ℓ	溝数 Flutes	シャンク径 Ds	首下長さ Ln	首径 dn	形式 Type	在庫 Stock	参考価格(円) Price (¥)
2MO.4R	M2×0.4	REG P1	2.5	40	9.0	3	3.0	15	2.1*	1	●	1,870
2MO.4R+1		REG+1 P2										1,870
2.5MO.45R	M2.5×0.45	REG P1	2.5	44	10.0	3	3.0	16	2.7*	1	●	1,470
2.5MO.45R+1		REG+1 P2										1,470
2.6MO.45R	M2.6×0.45	REG P1	2.5	44	10.0	3	3.0	16	2.7*	1	●	1,310
2.6MO.45R+1		REG+1 P2										1,310
3MO.5R	M3×0.5	REG P2	2.5	46	5.0	3	4.0	18	2.4	2	●	1,050
3MO.5R+1		REG+1 P3										1,050
3.5MO.6R	M3.5×0.6	REG P2	2.5	48	6.0	3	4.0	18	2.8	2	●	1,130
3.5MO.6R+1		REG+1 P3										1,130
4MO.7R	M4×0.7	REG P2	2.5	52	7.0	3	5.0	20	3.1	2	●	1,000
4MO.7R+1		REG+1 P3										1,000
5MO.8R	M5×0.8	REG P2	2.5	60	8.0	3	5.5	22	4.0	2	●	1,030
5MO.8R+1		REG+1 P3										1,030
6M1R	M6×1	REG P2	2.5	62	12.0	3	6.0	29	4.75	2	●	1,100
6M1R+1		REG+1 P3										1,100
6MO.75R	M6×0.75	REG P2	2.5	62	9.2	3	6.0	29	5.05	2	●	1,490
6MO.75R+1		REG+1 P3										1,490
7M1R	M7×1	REG P2	2.5	65	12.0	3	6.2	29	5.75	3	●	1,460
7M1R+1		REG+1 P3										1,460
8M1.25R	M8×1.25	REG P3	2.5	70	15.4	3	6.2	33	6.55	4	●	1,610
8M1.25R+1		REG+1 P4										1,610
8M1R	M8×1	REG P2	2.5	70	12.4	3	6.2	27	6.75	4	●	2,010
8M1R+1		REG+1 P3										2,010
8M1R+2	REG+2 P4										●	2,010
10M1.5R	M10×1.5	REG P3	2.5	75	18.9	3	7.0	37	8.25	4	●	2,030
10M1.5R+1		REG+1 P4										2,030
10M1.25R	M10×1.25	REG P3	2.5	75	15.7	3	7.0	33	8.55	4	●	2,030
10M1.25R+1		REG+1 P4										2,030
10M1R	M10×1	REG P2	2.5	75	12.4	3	7.0	27	8.75	4	●	2,550
10M1R+1		REG+1 P3										2,550
10M1R+2	REG+2 P4										●	2,550
12M1.75R	M12×1.75	REG P3	2.5	82	22.4	3	8.5	42	9.95	4	●	2,820
12M1.75R+1		REG+1 P4										2,820
12M1.5R	M12×1.5	REG P3	2.5	82	20.9	3	8.5	40	10.25	4	●	2,820
12M1.5R+1		REG+1 P4										2,820
12M1.25R	M12×1.25	REG P3	2.5	82	17.2	3	8.5	35	10.55	4	●	2,820
12M1.25R+1		REG+1 P4										2,820
14M2R	M14×2	REG P2	2.5	88	25.9	3	10.5	46	11.65	4	●	3,840
14M2R+2		REG+2 P4										3,840
14M1.5R	M14×1.5	REG P2	2.5	88	20.9	3	10.5	40	12.25	4	●	3,840
14M1.5R+2		REG+2 P4										3,840
16M2R	M16×2	REG P2	2.5	95	25.9	3	12.5	49	13.65	4	●	5,120
16M2R+2		REG+2 P4										5,120
16M1.5R	M16×1.5	REG P2	2.5	95	20.9	3	12.5	40	14.25	4	●	5,120
16M1.5R+2		REG+2 P4										5,120
18M2.5R	M18×2.5	REG P3	2.5	100	32.6	4	14.0	55	15.15	4	●	7,000
18M2.5R+2		REG+2 P5										7,000
18M1.5R	M18×1.5	REG P2	2.5	100	20.9	4	14.0	40	16.25	4	●	7,000
18M1.5R+2		REG+2 P4										7,000
20M2.5R	M20×2.5	REG P3	2.5	105	32.6	4	15.0	55	17.15	4	●	9,080
20M2.5R+2		REG+2 P5										9,080
20M1.5R	M20×1.5	REG P2	2.5	105	20.9	4	15.0	40	18.25	4	●	9,080
20M1.5R+2		REG+2 P4										9,080
22M2.5R	M22×2.5	REG P3	2.5	115	32.6	4	17.0	55	19.15	4	●	11,800
22M2.5R+2		REG+2 P5										11,800
22M1.5R	M22×1.5	REG P2	2.5	115	20.9	4	17.0	40	20.25	4	●	11,800
22M1.5R+2		REG+2 P4										11,800
24M3R	M24×3	REG P3	2.5	120	38.8	4	19.0	63	20.65	4	●	14,700
24M3R+2		REG+2 P5										14,700
24M1.5R	M24×1.5	REG P2	2.5	120	22.4	4	19.0	50	22.25	4	●	14,700
24M1.5R+2		REG+2 P4										14,700

\*: 呼び径<首径です。めねじ加工深さが深い場合、ねじ長以上入れると折損の危険があります。

\*: Thread Size < Neck diameter (dn) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

● 形式1~2は突出しセンタ ● Type 1~2 with External Centre